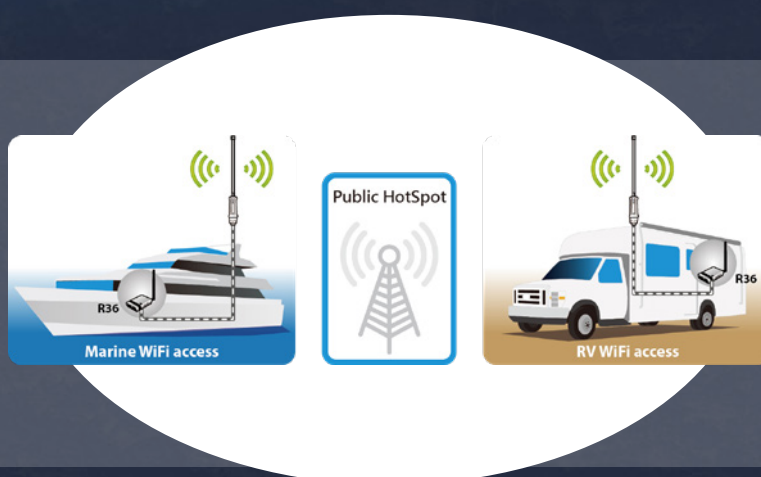# ALFA NETWORK

# WiFi CAMP PRo 2



**WiFi CampPro 2** is a professionally tuned and highly integrated system that retreives and extend Internet access for RV & yacht from remote WiFi hotspots.

## Intuitive QR Smart phone / Web Configurator device setup

Simple & Comprehensive Setup QR-Setup via smartphone or seup wizard via web configurator demands no expertise during setting up

## Improved wireless performance & Signal Coverage

Extends WiFi hotspot Internet access from far away, and enhance the WiFi coverage inside your yacht or RV .
Easily make WiFi or VoIP calls when cellular signal is weak.

## Simple to scan and find network

Scans and connects to WiFi hotspot station and rebroadcasts around your yacht and RV Instantly share the extended Internet access to your mobile devices, smart TVs, and gaming consoles

# PRODUCT DETAILS

### R36A Specifications

| Wi-Fi Standard | IEEE 802.11n IEEE802.11g IEEE 802.11b | Wireless LAN Security Key | 64/128bit WEP WPA-PSK WPA-EAP (PEAP/TTLS) WPA2-PSK WPA2-EAP WPA Mixed 802.1x authentication |
|---|---|---|---|
| Frequency | 2.142GHz –2.472GHz | | |
| Channel Width | 20/40MHz | | |
| DataRate | 802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps | Operation Temperature | -20°C ~ 40°C |
| Antenna | 1xinternal 1x external | Storage Humidity | 10% ~ 90% (Non-condensing) |
| LED Indicators | Power, LAN,WAN, WLAN, USB | Dimension(mm) | 93x70x26 mm |
| Power requirement | 12VDC | Weight | 74g |

### Tube-U4G Specifications

| Wi-Fi Standard | IEEE 802.11n IEEE802.11g IEEE 802.11b |
|---|---|
| Frequency | 2.412GHz ~ 2.472GHz |
| Channel Width | 20/40MHz |
| Antenna connector | Nmale |
| Interface | USB 2.0 type-A male |
| LED Indicators | PWR, LINK |
| Power required | 5V±5% |

### Antenna Specifications

| Outdoor Antenna | Model: AOA-2409TF Frequency: 2.4GHz-2.5GHz Impedance: 50Ω S.W.R: ≤ 2.0 Gain: 9dBi Radiation: Omni Connector N female Material: Fiber Glass Length: 460mm |
|---|---|
| Indoor Antenna | Model: ARS-N05 Frequency: 2.4GHz-2.5GHz Impedance: 50Ω S.W.R: ≤ 2.0 Gain: 5dBi Radiation: Omni Connector: RP-SMA male Material: Rubber Length: 171.5mm |

www.amikostb.com